


- 21 Product Double block & bleed valve
 Product type Floating & Trunnion
 Construction Side entry
 Size range 1/2" to 8"
 Pressure rating range CL 150, CL 300, CL 600, CL 900, CL 1500, CL 2500
 Material range Carbon steel, Low carbon steel, SS, Duplex SS
 Internals Stem, Ball: SS, Duplex SS, Seat : PTFE
 Ends Flanged, BWE
 Operator Lever operated, Gear operated, Electrical Actuator



- 22 Product type Butterfly valve
 Construction Offset disc design
 Size range DN 50 to DN 1000
 Pressure rating range CL 150, CL 300, CL 600
 Material range Carbon steel, SS, Duplex SS
 Internals SS, Duplex SS
 Ends Flanged
 Operator HW - Manual, Electrical Actuator, Pneumatic Actuator

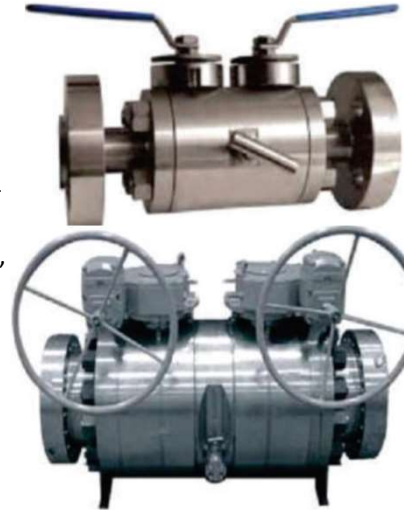

- 23 Product type Plug valve
 Construction Self lubricated type
 Size range 2" to 24"
 Pressure rating range CL 150, CL 300, CL 600
 Material range Carbon steel, Low carbon steel, SS, Duplex SS
 Internals Stem, Plug: SS, Duplex SS, Seat : PTFE
 Ends Flanged
 Operator Lever operated, Gear operated, Electrical Actuator



FOOD & MINING, CHEMICAL INDUSTRIES

24 Product type Diaphragm valves
 Construction WEIR type, Straight through
 Size range 2" to 16"
 Pressure rating range PN 10, PN 16, CL 150
 Material range Ductile iron, Carbon steel
 Lining Hard rubber, Butyl, PFA...
 Internals Stem: SS, Diaphragm : PFA / PTFE, EPDM, Butyl...
 Ends Flanged
 Operator Hand wheel, Gear operated, Electrical Actuator



25 Product type PFA lined Butterfly valves
 Construction Centric design
 Size range 2" to 24"
 Pressure rating range PN 10, PN 16, CL 150
 Material range Ductile iron, Carbon steel
 Internals Stem, disc : SS with PFA overmoulded
 Ends Wafer, Lug, Flanged Lever operated, Gear operated, Electrical Actuator
 Operator



26 Product type PFA lined Ball valves Floating
 Construction 2" to 24"
 Size range
 Pressure rating range PN 10, PN 16, CL 150
 Material range Ductile iron, Carbon steel
 Internals Stem, disc : SS with PFA overmoulded
 Ends Flanged
 Operator Lever operated, Gear operated, Electrical Actuator



27 Product type PFA lined Diaphragm valves
 Construction WEIR type
 Size range 2" to 16"
 Pressure rating range PN 10, PN 16, CL 150
 Material range Ductile iron, Carbon steel
 Internals Stem: SS, Diaphragm : PFA / PTFE
 Ends Flanged
 Operator Hand wheel, Gear operated, Electrical Actuator



28	Product type	PFA lined Plug valves
	Construction	Floating
	Size range	2" to 16"
	Pressure rating range	PN 10, PN 16, CL 150
	Material range	Ductile iron, Carbon steel Stem, disc : SS with PFA over moulded
	Internals	Flanged
	Ends	Lever operated, Gear operated, Electrical Actuator
	Operator	



Arek Solutions, LLC.
Houston, Texas (USA)
Ph: +1.832.449.6845
Email: Contact@ArekSolutions.com
www.ArekSolutions.com